


BOLD

METAL INTERLOCK FLOOR FINISH

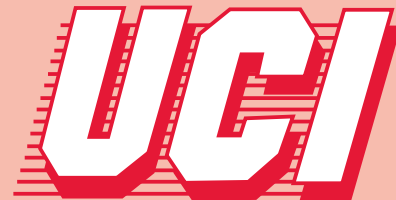

DESCRIPTION

This product is a floor polish breakthrough designed specifically to achieve outstanding performances when used with high-speed buffing equipment. This high-solids floor finish is **formulated with thermoplastics and urethane** to create a totally unique floor finish of excellent color. It is the high melting point, pressure emulsified thermoplastics that permit this floor finish to have a **shine superior to conventional acrylic finishes**. The urethane, long known for its wearability, fortifies this finish to provide **increased durability**. Furthermore, unlike other floor finishes, there is **no dark resin used**; therefore, the dried film on the floor lets the true floor color shine through.

BENEFITS - FEATURES

- * "Wet look"
- * Resists powdering, scuffing, & heel marks
- * Versatile
- * Use on all types of floors
- * Economical
- * Self-sealing

ADVANTAGES

- * High melting point
- * Responds to buffing from 300-2,000 plus RPM's
- * Covers up to 4,000 sq. ft./gallon

WHERE TO USE

- * All Floors
- * Concrete
- * Terrazzo
- * Terrazzo
- * Terrazzo
- * Resilient Flooring

RECOMMENDED FOR

- * Schools
- * Institutions
- * Hospitals
- * Nursing Homes
- * Restaurants
- * Cafeterias
- * Shopping Malls
- * Show Rooms
- * Office Buildings
- * Government Buildings
- * Hotels
- * Motels
- * Churches
- * Airports
- * Athletic/Country Clubs
- * Public Buildings

DIRECTIONS

Read the entire label before using this product.

Recommended for use on all types of resilient tile flooring and properly prepared hard surfaces.

RESTORATIVE MAINTENANCE:

Completely remove all old wax, finish and soil from floor surface. Floor surface must be clean, dry and free of residue before finish is applied. Rinse with clean water if necessary. Apply finish in uniform, thin to medium coats using a clean synthetic finish mop, microfiber mop or applicator system. Allow each coat to dry thoroughly

before applying additional coats, usually 20-30 minutes. Elevated temperatures, heavy coats and humidity may extend dry time. A minimum of 4 coats of finish is recommended.

Note: This product is a self-sealing finish, however, if tile is old, worn or porous, initially applying 1 -2 coats of a sealer will enhance gloss and long term performance.

ROUTINE MAINTENANCE:

Sweep large debris and dust mop. Damp mop or automatic scrub using a neutral cleaner. Buff or burnish the floor to

enhance gloss as needed. Use Ultra-Chem Inc. Glide spray buff to extend time between re-coating.

INTERIM MAINTENANCE:

Sweep large debris and dust mop. Top scrub with a maroon pad to remove the top soiled layers of finish. Floor surface must be clean, dry and free of residue before finish is applied. Apply 1 - 2 coats of finish as directed above.

Note: Slip resistance meets or exceeds standard, (ASTM D 2047-11) James Machine 0.5 minimum.

SPECIFICATIONS

Odor.....Mild
 Color (liquid).....Milky white
 Color (dried film).....Water clear
 Gloss (gardner) 1 coat.....80-85
 2 coats.....90-95
 pH.....8.5
 Total solids.....27.6%

Nonvolatile solids.....22.0%
 Buffability
 300 RPM.....Very good
 1,000 RPM.....Excellent
 2,000 RPM.....Superb
 Leveling, recoat, heel mark
 resistance, detergent resistance,
 powdering resistance.....Excellent

Freeze/thaw stability.....3 cycles
 Shelf life.....2 years min.
 Slip resistance.....Static coefficient of
 friction meets or exceeds by ASTM
 method D2047-75
 Coverage.....3,000-4,000 sq. ft./gallon
 Drying time.....20-30 minutes

Another Exclusive Product of

ULTRA-CHEM INC.

Kansas City - Phoenix 800-451-0726

